


AD 490

Doosan
Mecc Alte
D+ &



| | |
|----------------|-------------|
| ISO8528 | GC,) & |
| SZUTEST | GC - \$\$\$ |
| CE | |

2000/14/EC & \$\$\$#(#
z) \$ z' \$z 'D:

| | " | " | " | " | Amp |
|---------|--------|--------|--------|--------|--------|
| 400/230 | 485,00 | 388,00 | 425,00 | 340,00 | 613,00 |

fP GDE GC,) &
,) & z fDF DE % \$! % % & GC " \$ (* z & GC

Standard Specifications

z
fl ! E
z
z

1

fl ! E
z
z

ALTERNATOR

D; A Z '5J F
fl " E
fP \$\$\$ \$\$\$ E

TRANSFER SWITCH

fl " E

AD 490

Doosan
Mecc Alte
D+' &''

| | | | | |
|--------------------------------------|--------|----------------------------|-------|-------|
| Manufacturer | | Doosan | | |
| Model | | P158LE | | |
| | | % \$\$\$ "# " | | |
| | | (% \$\$\$ " Q)) \$\$\$< DQ | | |
| | L | 14,600 | | |
| | " | 128 x 142 | | |
| | | 15,0:1 | | |
| | fl # 7 | "# " | 1500 | |
| | fl 7 | L | 21,00 | |
| | | L | 88,50 | |
| AbsorbedAirDischargeReSourceKey.Text | ' # " | 25,50 | | |
| | ' # " | 410,00 | | |
| fl ' # 7 | ' # " | 78,30 | | |
| | ° C | 580,00 | | |
| | | 24 V d.c. | | |
| | Load | % \$\$i | '+) i |) \$i |
| | # " | 89,30 | 65,10 | 43,90 |


| | | | | |
|-------------|------|-------------|--|--|
| | | Mecc Alte | | |
| | | ECO 40-2S/4 | | |
| | Hz | 50 | | |
| | " | 450,00 | | |
| 7cg' | | 0,80 | | |
| | | 3 | | |
| | fl 7 | 400/230 | | |
| | A | 649,00 | | |
| Temperature | | H | | |

| | | fl 7 | | fl 7 | |
|--------|---------|---------|---------|---------|--------|
| | " | " | " | " | L |
| AD 490 | 3130,00 | 3026,00 | 1550,00 | 1994,00 | 700,00 |
| | | fl 7 | | fl 7 | |
| | " | " | " | " | L |
| MS 70 | 4150 | 4400 | 1560 | 2360 | 700 |

AD 490

Doosan
Mecc Alte
D+' &'

1 D+' &'

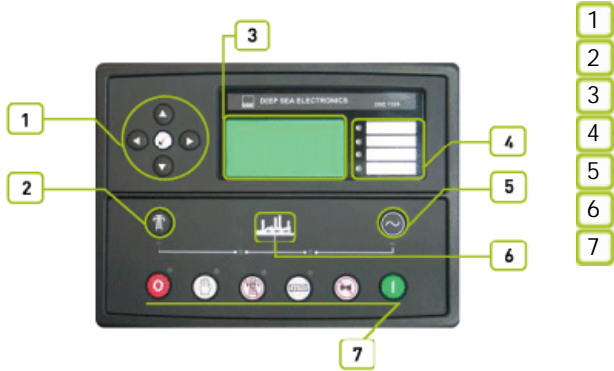

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ ž &&\$ ž ž

8G9+' &\$ 8G9+' &\$

ž

% &1 * (

žFG& žFG(,) ž

ž

AD 490

Doosan
Mecc Alte
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž

ž

ž

AD 490

Doosan
Mecc Alte
D+ &



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

| | | |
|-------|---|------|
| | " | 1560 |
| fl "L | " | 4400 |
| fl "L | " | 2360 |
| | L | 700 |