

AC 350

Cummins
Mecc Alte
D+ &



| | | | | | | |
|----------------|-----|-----|-----|-----|-----|--------------|
| ISO8528 | ... | ... | ... | ... | ... | GC ;) &- |
| SZUTEST | ... | ... | ... | ... | ... | GC - \$\$\$% |
| CE | ... | ... | ... | ... | ... | |

| | | | | | | |
|-------------------|-----|-----|-----|-----|-----|-------------------|
| 2000/14/EC | ... | ... | ... | ... | ... | \$\$\$#(# |
| | ... | ... | ... | ... | ... | z) \$' z' \$z 'D: |

| | " | " | " | " | Amp |
|---------|--------|--------|--------|--------|--------|
| 400/230 | 350,00 | 280,00 | 300,00 | 240,00 | 433,00 |

| | | | | | | |
|-----|-----|-----|-----|-----|-----|--------------------------------------|
| ... | ... | ... | ... | ... | ... | fDGD' GC ;) & |
| ... | ... | ... | ... | ... | ... | fDF D' % \$! % % & GC " \$(** z&(GC |

Standard Specifications

| | | | | | | |
|-----|-----|-----|-----|-----|-----|--------|
| ... | ... | ... | ... | ... | ... | z |
| ... | ... | ... | ... | ... | ... | fl ! E |
| ... | ... | ... | ... | ... | ... | z |
| ... | ... | ... | ... | ... | ... | z |

1

| | | | | | | |
|-----|-----|-----|-----|-----|-----|----|
| ... | ... | ... | ... | ... | ... | fl |
| ... | ... | ... | ... | ... | ... | z |

ALTERNATOR

| | | | | | | |
|-----|-----|-----|-----|-----|-----|------------------|
| ... | ... | ... | ... | ... | ... | fl " E |
| ... | ... | ... | ... | ... | ... | fD \$ \$ \$ \$ E |
| ... | ... | ... | ... | ... | ... | fl " \$ E |

TRANSFER SWITCH

| | | | | | | |
|-----|-----|-----|-----|-----|-----|---|
| ... | ... | ... | ... | ... | ... | z |
|-----|-----|-----|-----|-----|-----|---|

AC 350

Cummins
Mecc Alte
D+ &

| | | | | | | | | | | | | | | | | |
|--------------------------------------|--------|---|---------|--------|----------------|--|--|--|------------------|--|--|--|----------------|--|--|--|
| Manufacturer | | Cummins | | | | | | | | | | | | | | |
| Model | | QSL9-G5 | | | | | | | | | | | | | | |
| | | <table border="1"> <tr> <td>% \$ \$ ' "# "</td> <td></td> <td></td> <td></td> </tr> <tr> <td>' % \$ \$ \$ ' "</td> <td></td> <td></td> <td></td> </tr> <tr> <td>Q % \$ \$ < DQ</td> <td></td> <td></td> <td></td> </tr> </table> | | | % \$ \$ ' "# " | | | | ' % \$ \$ \$ ' " | | | | Q % \$ \$ < DQ | | | |
| % \$ \$ ' "# " | | | | | | | | | | | | | | | | |
| ' % \$ \$ \$ ' " | | | | | | | | | | | | | | | | |
| Q % \$ \$ < DQ | | | | | | | | | | | | | | | | |
| | L | 8,800 | | | | | | | | | | | | | | |
| | " | 114 X 145 | | | | | | | | | | | | | | |
| | | 16,8:1 | | | | | | | | | | | | | | |
| | fl # 7 | "# " | 1500 | | | | | | | | | | | | | |
| | fl 7 | L | 26,50 | | | | | | | | | | | | | |
| | | L | 28,60 | | | | | | | | | | | | | |
| AbsorbedAirDischargeReSourceKey.Text | ' # " | 20,40 | | | | | | | | | | | | | | |
| | ' # " | 475,00 | | | | | | | | | | | | | | |
| | ' # " | 31,20 | | | | | | | | | | | | | | |
| | ° C | 560,00 | | | | | | | | | | | | | | |
| | | 24 V d.c. | | | | | | | | | | | | | | |
| | Load | % \$ \$ i | ' +) i |) \$ i | | | | | | | | | | | | |
| | # " | | | | | | | | | | | | | | | |
| | | 63,00 | 46,00 | 31,00 | | | | | | | | | | | | |


| | | | | |
|------|------|-----------|--|--|
| | | Mecc Alte | | |
| | | ECO38-3LN | | |
| | Hz | 50 | | |
| | " | 350,00 | | |
| 7cg' | | 0,80 | | |
| | | 3 | | |
| | fl 7 | 400/230 | | |
| | A | 505,00 | | |

| | | fl 7 | | fl 7 | |
|--------|---------|---------|---------|---------|--------|
| | " | " | " | " | L |
| AC 350 | 2630,00 | 2936,00 | 1300,00 | 1869,00 | 450,00 |
| | | fl 7 | | fl 7 | |
| | " | " | " | " | L |
| MS 60 | 3450 | 4000 | 1300 | 1970 | 450 |

AC 350

Cummins
Mecc Alte
D+' &'

1 D+' &'

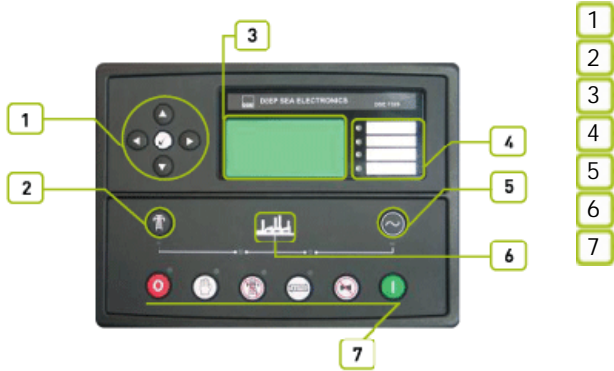

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ ž fI
&&\$ ž
8G9+' &\$ ž
8G9+' &\$ ž
% &1 * (ž
žFG' &žFG(,) ž

AC 350

Cummins
Mecc Alte
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

% , !&*(

&(\$)


ž

ž

ž

AC 350

Cummins
Mecc Alte
D+ &''

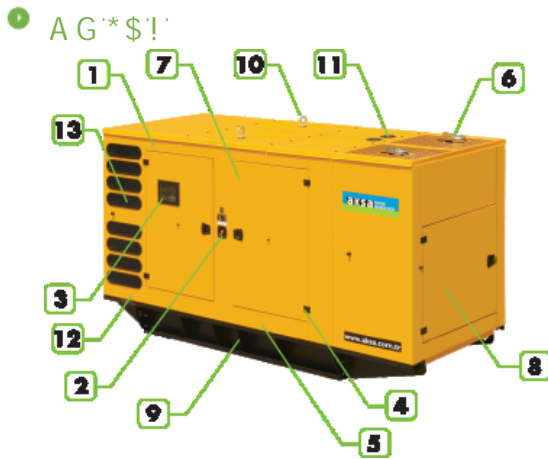

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

| | | |
|-------|---|------|
| | " | 1300 |
| fl "L | " | 4000 |
| fl "L | " | 1970 |
| | L | 450 |